



# SWISS FLOW

Air Filtration Co., Inc. is pleased to offer an ultra-premium 600G ceiling media. Our new Swiss Flow Series features an improved fiber and tack design to offer incredible efficiency for the most critical applications.

- Actual thickness of 1.125"
- Temperature resistance up to 212° F, F1 rated
- Available in bulk rolls, cut blankets, and panels
- Exceeds UL900, DIN53438, and EN779 Standards

Performance Measure	Swiss Flow Diffusion Media*
Initial Resistance (100 fpm)	0.3 wg
Average Efficiency 5.5-7 Microns	99.8%
Average Efficiency 7-10 Microns	99.9%
Rating (100 fpm)	MERV 9

\*All data in above table is per ASHRAE Standard 52.2 Test 18-519-1

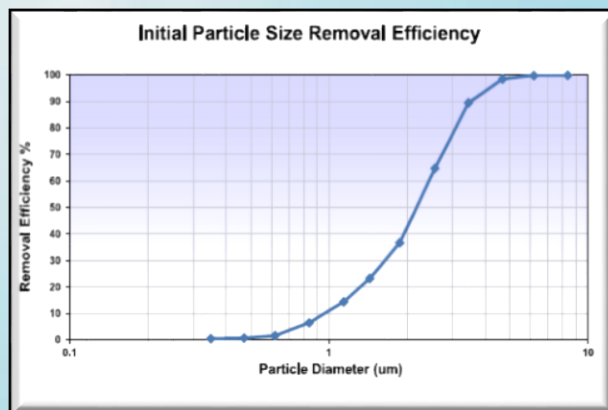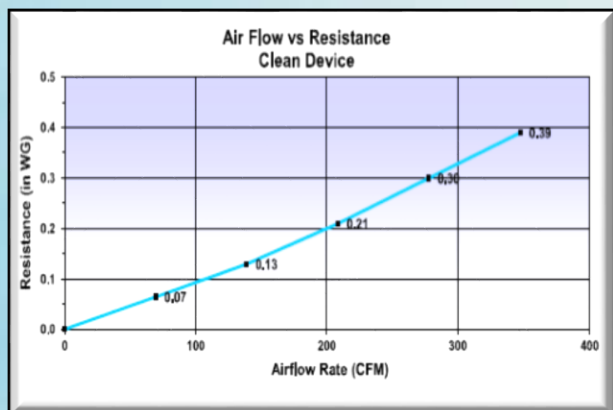

EPA COMPLIANT PAINT ARRESTORS  
INTAKE FILTERS & DIFFUSION MEDIA  
PREFILTERS & EXTRACTION FILTERS  
SPRAY BOOTH ACCESSORIES  
PROTECTIVE COATINGS



800.848.5859

WWW.AFCFILTERS.COM